
# Memory management


#### Johan Montelius

KTH

2020

### virtual memory and segmentation

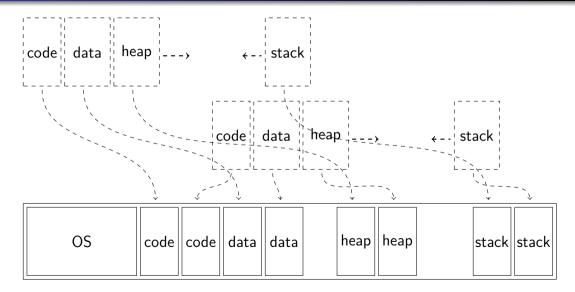

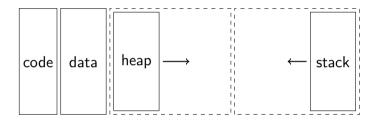


How do we obtain more memory for the heap data structures?

brk() and sbrk() change the location of the program break, which defines the end of the process's heap segment brk() sets the end of the heap segment to the value specified by addr **#include** <unistd.h> sbrk() increments the program's heap space by int brk(void \*addr): void \*sbrk(intptr t incr):increment bytes. It returns the previous program break. Calling sbrk() with an increment of 0 can be used to find the current location of the program

break

```
#include <stdlib.h>
#include <unistd.h>
int *allocate_array_please(int size) {
   return (int*)sbrk(size * sizeof(int));
}
```

# a growing heap

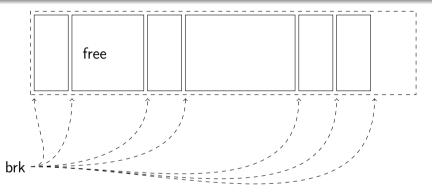

How do we reuse allocated memory?

# C program

:

```
#include <stdlib.h>
```

```
int global = 42;
```

```
int main(int argc, char *argv[]) {
```

```
if (argc < 2) return -1;
```

```
int n = atoi(argv[1]);
```


```
int on_stack[5] = {1,2,3,4,5};
```

```
int *on_heap = malloc(sizeof(int)*n);
```


```
The malloc() function allocates size bytes and
                                   returns a pointer to the allocated memory. The
                                   memory is not initialized.
                                   If size is 0, then malloc() returns either NULL,
#include <stdlib.h>
                                  or a unique pointer value that can later be
void *malloc(size_t size); successfully passed to free().
void free(void *ptr);
                                   The free() function frees the memory space
                                   pointed to by ptr. which must have been
                                   returned by a previous call to malloc(), ...
```

2

# The operating system

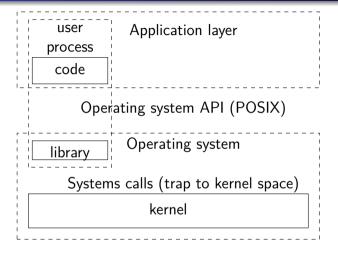

Library is often just a wrapper for the system call - sometimes more complex.

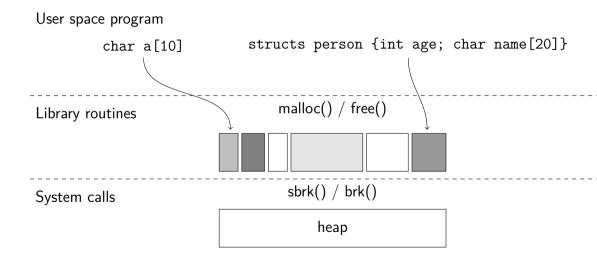


If we would not have to reuse freed memory areas - management would be simple.


- Calling sbrk() is costly i.e. better to do a few large allocations and then do several smaller malloc() operations.
- Keep track of freed memory, to reuse it in following malloc().

Assume each free block holds a header containing: the size and a pointer to the next block.

```
typefdef struct __node_t {
    int size;
    struct __node_t *next;
}
```



When we malloc we first search the free-list for a suitable block.




char \*buf = malloc(20)

### return a block


How do we return a block?

free(this)

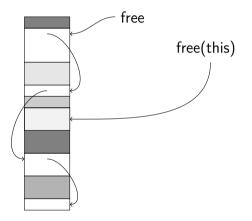


What's the problem?

### hidden information

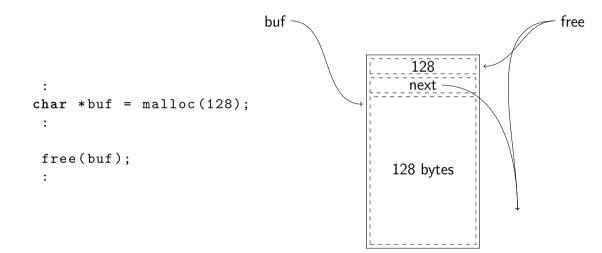


## Malloc - find a suitable block and split it.



Which block shall we pick?

When we return a block we need to merge it with adjacent free blocks - if any.



- Best fit: the block that minimize the left over.
- Worst fit: the block that maximize the left over.
- First fit: pick the first one.

You should know the pros and cons of these strategies.

Idéa - keep separate lists of blocks of different size.

Assume we keep lists for blocks of: 8, 16, 32, 64 ... bytes.

- Easy to serve and return blocks of given size.
- What should we do if we are asked for block of size 24?
- What sizes should we choose, what needs to be considered?

We can build our own allocator that is optimized for a given application.

The C standard library glibc used in most GNU/Linux distributions use a memory allocator called ptmalloc3 (pthread malloc).


Multithreaded, each thread has a separate heap.

Uses multiple *bins* (free lists) to keep *chunks* of different size.

Will coalesce adjacent chunks.

If we should allow blocks to be divided then we should also provide efficient coalescing.

Assume total memory 128Kibyte, smallest allocated frame 4Kibyte

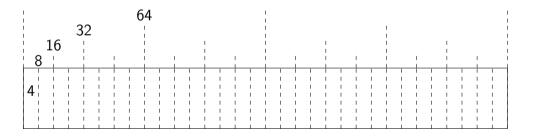

Assume we number our 32 frames from 0b00000 to 0b11111.

Who's the buddy of: 4K at 0b00011 16K at 0b10100 8K at 0b01000

#### Pros:

- Efficient allocation and deallocations of frames.
- Coalescing efficient, O(lg(n))
- Handles external fragmentation well.

#### Cons:

• Internal fragmentation - if we need a frame of 9 blocks we get 16!

Linux uses Buddy allocations when managing physical memory - check /proc/buddyinfo.

#### mmap - memory map

mmap() creates a new mapping in the virtual

address space of the calling process.

flags, fd and offset for mapping of file in memory Originally from 4.2BSD, default in OSX where malloc() uses mmap() to allocate memory.

brk() and sbrk()

- easy to extend the process heap
- not easy to hand back allocated memory
- only one "heap"
- not part of POSIX

### mmap()

- POSIX standard
- easy to allocate several large areas
- easy to hand back allocated memory
- ability to map a file in memory

# Programmers point of view

- Explicit memory management: the programmer needs to explicitly free objects.
  - Used in C, C++ and most system level programming languages.
  - Pros: efficient usage of memory.
  - Cons: hard to find bugs when you don't do it right.
- Implicit memory management: memory is freed by the system.
  - Managed by the runtime system i.e. a garbage collector (Java, Erlang, Python, ..) or by the compiler (Mercury, Rust ...).
  - Pros: much simpler and/or safer.
  - Cons: could result in runtime overhead and/or lack of control.

- user process API: malloc() and free()
- system calls: sbrk() or mmap()
- how to find suitable memory block.
- how to free memory blocks for efficient reuse
- coalescing smaller blocks